

12-28-99

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No.	678-413 (P8984)
	First Inventor or Application Identifier	Jae-Duk Yang
	Title	METHOD AND SYSTEM FOR CONTROLLING
	Express Mail Label No.	EL393559985US

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 21] (preferred arrangement set forth below) <ul style="list-style-type: none"><li>- Descriptive title of the Invention</li><li>- Cross References to Related Applications</li><li>- Statement Regarding Fed sponsored R &amp; D</li><li>- Reference to Microfiche Appendix</li><li>- Background of the Invention</li><li>- Brief Summary of the Invention</li><li>- Brief Description of the Drawings (if filed)</li><li>- Detailed Description</li><li>- Claim(s)</li><li>- Abstract of the Disclosure</li></ul>	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none"><li>a. <input type="checkbox"/> Computer Readable Copy</li><li>b. <input type="checkbox"/> Paper Copy (identical to computer copy)</li><li>c. <input type="checkbox"/> Statement verifying identity of above copies</li></ul>
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 2]	<b>ACCOMPANYING APPLICATION PARTS</b> 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other: _____
4. Oath or Declaration [Total Pages 2] <ul style="list-style-type: none"><li>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</li><li>b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none"><li>i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).</li></ul></li></ul>	

**\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_  
Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_  
**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Paul J. Farrell				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Paul J. Farrell	Registration No. (Attorney/Agent)	33,494
Signature	<i>Paul J. Farrell</i>	Date	12/27/99

PATENT

Atty. Docket No. 678-413 (P8984)

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Assistant Commissioner  
for Patents  
Washington, D.C. 20231

**UTILITY APPLICATION FEE TRANSMITTAL**

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Jae-Duk Yang

For: METHOD AND SYSTEM FOR CONTROLLING OPERATION MODE  
SWITCHING OF PORTABLE TELEVISION (TV) PHONE

Enclosed are:

[X] 17 page(s) of specification

[X] 1 page(s) of Abstract

[X] 3 page(s) of claims

[X] 2 sheets of drawings [X] formal ☐ informal

[X] 2 page(s) of Declaration and Power of Attorney

[X] An Assignment of the invention to Samsung Electronics Co., Ltd.

**CERTIFICATION UNDER 37 C.F.R. § 1.10**

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date December 27, 1999 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL393559985US addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Daniel E. Tierney

(Type or print name of person mailing paper)

(Signature of person mailing paper)

- ☐ This application claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Application(s) No(s).:

APPLICATION NO(S).:

FILING DATE

\_\_\_\_/\_\_\_\_/\_\_\_\_

\_\_\_\_\_

\_\_\_\_/\_\_\_\_/\_\_\_\_

\_\_\_\_\_

- ☒ Certified copy of applications

Country

Appln. No.

Filed

Korea

59063

December 26, 1998

from which priority under Title 35 United States Code, § 119 is claimed  
☐ is enclosed.

☒ will follow.

**CALCULATION OF UTILITY APPLICATION FEE**

For	Number Filed	Number Extra	Rate	Basic Fee \$760.00
TOTAL CLAIMS	15	0	x 18 =	\$0
INDEPENDENT CLAIMS	2	0	x 78 =	\$0
<input type="checkbox"/> Multiple Dep. Claim	0		260	\$0
			TOTAL \$760.00	

- ☐ Verified Statement of "Small Entity" Status Under 37 C.F.R. § 1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith \$.

\*Includes all independent and single dependent claims and all claims referred to in multiple claims. See 37 C.F.R. § 1.75(c).


[X] The amount of \$40.00 for recording the attached Assignment is enclosed as a separate check.

[X] Two checks in the amount of \$760.00 & \$40.00 to cover the [X] recording, [X] filing fee(s) are attached.

[ ] Charge fee to Deposit Account No. 04-1121. Order No. \_\_\_\_\_  
TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

[X] Please charge any deficiency as well as any other fee(s) which may become due under 37 C.F.R. § 1.16 and 1.17, at any time during the pendency of this application, or credit any overpayment of such fee(s) to Deposit Account No. 04-1121. Also, in the event any extensions of time for responding are required for the pending application(s), please treat this paper as a petition to extend the time as required and charge Deposit Account No. 04-1121 therefor. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

Date: December 27, 1999

  
\_\_\_\_\_  
Paul J. Farrell  
Reg. No. 33,494

DILWORTH & BARRESE  
333 Earle Ovington Blvd.  
Uniondale, NY 11553  
Tel. No. (516) 228-8484  
Fax. (516) 228-8516

**METHOD AND SYSTEM FOR CONTROLLING OPERATION**  
**MODE SWITCHING OF PORTABLE TELEVISION (TV)**  
**PHONE**

**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

The present invention relates to a method and system for controlling operation of a hand-held portable cellular telephone, and more particularly to a method for controlling a switchover of an operation mode of an integrally combined television (TV) and portable cellular phone (hereinafter, referred to as "TV phone").

**2. Description of the Related Art**

In recent years, rapid and wide spread use of portable cellular telephones as a personal communication appliance has driven development of portable phones with a variety of functions in addition to a simple conversation function. For example, portable phones have developed to include a calculator, a biorhythm checking feature, and the capability of transmitting and/or receiving images of a TV and a video camera. The term "TV phone" herein refers to wireless portable cellular phones of all types which also provide television (TV) broadcast through a display unit of the portable phone, in addition to a cordless telephone conversation feature for telecommunication.

5 An example of the above TV phone is disclosed in Korean Patent Application No. 1995-46026 entitled "A Combined TV Receiver and Cellular Phone" by LG Electronics Co., Ltd., filed in the Korean Industrial Property Office on December 1, 1995 and published on July 31, 1997 by that Office.

For reception of a TV broadcast, the portable phone is equipped with two radio frequency units therein, as disclosed in the above-mentioned Korean patent application 1995-46026. The reason for this is that a frequency bandwidth necessary for transmitting and receiving telecommunication messages (i.e., voice and data) is different from that for a TV broadcast. An operation mode of the TV phone is classified into a phone mode, a waiting mode, and a TV mode, which is also used as the waiting mode. When operating in the TV mode, the TV phone allows a user to watch and hear images and voices of the television program received on a display unit, i.e. a Thin Film Transistor (TFT) Liquid Crystal Display (LCD), and a speaker or an earphone of the portable phone.

Disadvantages arise in the prior art when the TV phone is operating in the TV mode and there is an incoming call and/or an incoming character data message.

20 There is a need for a portable TV phone that allows the operation mode of the TV phone to be automatically switched from a TV mode to a phone mode so that the user (i.e., the called party) can speak over the

telephone with the calling party and the circuitry associated with the TV function can be disabled in order to prevent unnecessary consumption of the battery during the ensuing phone conversation. In addition, there is a need for a portable TV phone that allows the user to reject the incoming call in order to continue to view the TV program when the user does not care to respond to the incoming call.

The TV phone of the above-cited patent application 1995-46026 cannot process character messages received by the transmitter/receiver of the telecommunications feature when the TV is operating in TV mode and receiving a TV signal via the receiver of the TV. In addition, when the TV phone of patent application 1995-46026 receives an incoming voice call, the telephone rings, but it is impossible to directly switch the TV mode to the phone mode while in the TV mode. Accordingly, the user must turn off the TV phone, manually switch the TV mode to the phone mode with regard to every incoming call, and turn the phone back on. This consumes battery power and is highly inconvenient to the user.

### **SUMMARY OF THE INVENTION**

Therefore, an object of the invention is to provide a method for controlling switching of an operation mode of a TV phone where the operation mode of the TV phone is automatically switched from a TV mode to a phone mode upon the occurrence of an incoming of a call.

It is another object of the invention to provide a method for



controlling a switching of an operation mode of a TV phone where the user is informed of the call. It is also an objective that, upon reception of a call, the user may choose whether to switch the TV phone from the TV mode to the phone mode.

5           In accordance with one embodiment of the present invention, these objectives are accomplished by providing a method for controlling an operation mode switching of a portable TV phone. The TV phone includes a TV unit that reproduces and outputs a video signal from a selected channel. A TV audio signal processor processes an audio signal received by the TV unit for the selected channel and outputs it as audible sound. As described below, a display unit receives the video signal from the TV unit and displays the inputted video signal from the selected channel while in the TV mode. A mobile radio frequency processor ("MRFU") receives data of a forward channel transmitted from a base station. A mobile signal processor (MSP) has a TV mode and a phone mode, provides a channel selection signal to the TV unit in the TV mode and generates a character control signal in response to an incoming call. An on-screen display ("OSD") generates character images (including image character and graphic images) corresponding to the character control signal received at an input of the OSD. A multiplexer receives as input the character images of the OSD and the video signal of the TV unit and has an output that interfaces with the display unit. The multiplexer outputs the character images of the OSD or the video signal of the TV unit to the display unit based on a control signal received by the multiplexer from the MSP.

10

15

20

25



The method includes the steps of alerting the user of an incoming call by display of a character message on the display unit and/or an audio signal outputted from a speaker of the TV phone. The alert is in response to an incoming call signal transmitted from the base state when the TV phone is in the TV mode, i.e., in a state in which the video signals of the selected channel from the TV unit are displayed on the display unit and the audio signal for the selected channel are output by the TV audio signal processor. The TV phone is switched from the TV mode to the phone mode by disabling the operation of the TV unit in response to input by the user of a command that permits the call to proceed. The command initiates transmission of an incoming call response message to the calling party through a reverse channel. (Alternatively, the switching and proceeding with the call can occur automatically, if an appropriate setting is made by the user.) However, the TV phone is maintained in TV mode and the character message and/or audio signal used to alert the user to an incoming call is terminated in response to input by the user of a command rejecting the incoming of the call from the calling party.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The foregoing and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

Fig. 1 is a block diagram illustrating the construction of a TV phone according to a preferred embodiment of the present invention; and

Fig. 2 is a flowchart illustrating the process of controlling switching of an operation mode of the TV phone according to a preferred embodiment of the present invention.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

Referring to Fig. 1, a block diagram illustrating the construction of a TV phone according to a preferred embodiment of the present invention is shown. In Fig. 1, a mobile radio frequency unit (MRFU) 16, mobile station processor (MSP) 30, and key pad 32 all of a portable phone module, are shown. Such circuits may be configured as in conventional portable digital cellular phones, e.g., CDMA type portable cellular phones, and such construction and operation will be apparent from the following detailed description.

Also, the TV phone includes TV unit 18, an on-screen display (OSD) 34, a multiplexer 36 (hereinafter, referred to as "MUX"), a TV audio signal processor 38, and a display unit 40. The TV unit 18 and the TV audio signal processor 38 are TV modules.

Operations of the TV phone of Fig. 1 are as follows: when the TV phone is set to a TV mode, an alarm informs the user of the incoming call. The alarm can be set to one of three modes, for example: the incoming call alarm may trigger an audio alert, it may mute the TV phone audio and

switch an alerting image onto the display of the TV phone, or it may display a call incoming message at a specific region on the display.

A radio-frequency, electromagnetic signal is received by an antenna 12 which converts the radio-frequency, electromagnetic signal into an electrical signal which is supplied to a radio frequency filter, i.e., a bandpass filter 14. The bandpass filter 14 is operative to pass only frequency components of a frequency bandwidth for a TV broadcast. The bandpass filter 14 generates filtered signals, which are applied to the TV unit 18.

When the TV phone is set to a TV mode, the MSP 30 supplies a power control signal PW for the TV unit 18 and the TV audio signal processor 38. The MSP 30 supplies a phase locked loop, (hereinafter, referred to as "PLL"), 20 in the TV unit 18 with a channel selecting signal inputted via the key pad 32 or a channel selecting signal CH-S for selecting a previous viewing channel. PLL 20 oscillates a tuning frequency SEL-F corresponding to the channel-selecting signal and applies the SEL-F signal to TV tuner 20. TV tuner 20 combines the filtered signal from the bandpass filter 14 and the tuning frequency SEL-F from the PLL 20 and, for the selected channel, outputs a down-converted video intermediate frequency (VIF) signal to video demodulator 24 and outputs audio intermediate frequency (AIF) signal to TV audio signal processor 38.

A video demodulator 24 coupled to the output terminal of the TV

tuner 20 demodulates the video intermediate frequency (VIF) signal and outputs the resultant composite video signal Vcomp to NTSC decoder 26, (a video decoder). Video demodulator 24 also outputs a synchronizing signal SYNC of the composite video signal to a character superimposing signal generator 28. The NTSC decoder 26 decodes the composite video signal Vcomp and outputs the decoded composite video signal as color signals R, G, B to terminals A1–A3 of MUX 36.

The character superimposing signal generator 28 counts the synchronizing signal SYNC, and generates a character-superimposing signal if the counted signal value is a predetermined value. The character superimposing signal generator 28 comprises a counter that counts a horizontal synchronizing signal, a memory that stores a position value of a horizontal line, and a comparator that compares the counted signal value and the position value stored in memory. The character superimposing signal generator 28 generates a character superimposing control signal during a retrace period of the horizontal synchronizing signal if the comparator indicates the counted signal value from the counter is equal to the position value stored in memory. The character superimposing control signal is generated at regular intervals in every field or frame period.

Accordingly, the TV unit as constructed above is activated by a power control signal from the MSP 30, and generates a video signal and an audio signal of a TV broadcast channel according to the channel selecting signal, while also generating a character superimposing control

signal. The generation of such a character superimposing control signal will be advantageously used when the alert for an incoming call is a message displayed at a specific region on the display, as described further below.

5           MUX 36 selects the video signals R, G, and B input from the NTSC decoder 26 when a video selecting signal SEL-M output is from the MSP 30 at a "low" state. Video signals R, G, B, from NTSC decoder 26 are then applied to analog-to-digital converter (ADC) 42 of the display unit 40. The ADC 42 converts the selected video signals R, G, and B into digital signals which are output to timing control section 44. The timing control section 44, which includes a synchronizing signal generator for generating a pseudo-horizontal synchronizing signal and a pseudo-vertical synchronizing signal, drives a TFT-LCD 46. An image is thus displayed on the screen of the TFT-LCD 46. In addition, the TV audio signal processor 38 processes the audio intermediate frequency (AIF) signal inputted thereto from the TV tuner 20 to reproduce an audio signal for a TV program and output the reproduced audio signal through a transducer such as a speaker.

20           Thus, TV unit 18, TV audio signal processor 38, and display unit 40 receive and reproduce a video signal and an audio signal for a TV program in TV mode for a channel selected via the MSP 30. During this operation, when a user depresses a channel selection key (or keys) on the key pad 32 to select a desired channel, the MSP 30 changes the channel selecting signal CH-S output to PLL 22, thus changing the tuning

frequency and the output of the PLL 22, which in turn changes the channel of the TV tuner.

5 MRFU 16 is coupled to the antenna 12 and receives a radio-frequency signal of a transmitting/receiving frequency bandwidth for a portable phone. MRFU 16 converts a received analog signal into a digital signal for further processing or converts a digital signal into an analog signal and power-amplifies the converted signal for transmission via antenna 12. MRFU 32 comprises, for example, an RF unit combined with a baseband analog circuit of a conventional portable phone. For example, MRFU 32 can be constructed by combining a CDMA type radio transceiver unit, such as, for example, "BBA2.X (Q5312CDMA)" chip manufactured by QUALCOMM. Co. as a BBA circuit (for converting an analog signal into CDMA type digital data and vice versa), and an RF unit.

15 MSP 30 receives commands supplied from the keypad 32 and generates control signals corresponding to the commands. MSP 30 also performs a variety of operations such as analysis of a received forward channel data message, reproduction of an analog audio signal (i.e., a voice telephone signal) from the received data (including demodulation), extraction of character data from the received data and demodulating, de-  
20 interleaving, decoding, data signal processing, and vocoding of the digital signal inputted thereto from the MRFU 16. The MSP 30 also performs operations that output the reproduced analog audio signal to a speaker, and convert an analog audio signal input from a microphone (MIC) into a CDMA type digital signal for transmission to a channel through the MRFU

16. In addition, the MSP 30 informs a user watching a TV program of reception of an incoming call according to a call alarm mode set in an inner memory of the MSP. The call alarm mode is invoked to alert the user if the received forward channel data message is a message associated with an incoming call. The MSP 30 may be, for example, an MSMXX00 series one-chip type available from QUALCOMM Co.

The OSD 34 is coupled to an output of the MSP 30. OSD 34 generates OSD video signals corresponding to character generating control data output from the MSP 30. The OSD video signals R, G, B are output to input terminals B1-B3 of the MUX 36. As noted above, in TV mode, MUX 36 selects the video signals R, G, and B inputted to the input terminals A1-A3 when video selecting signal SEL-M output from the MSP 30 is at a "low" state.

Fig. 2 is a flowchart illustrating the process of controlling the switching of an operation mode of the TV phone according to a preferred embodiment of the present invention, in which the operation mode of the TV phone of Fig. 1 is switched from a TV mode to a phone mode upon the reception of an incoming call message, or is maintained in the TV mode. A program for the flowchart is housed in a memory block of the MSP 30 in shown in Fig. 1.

As shown in Fig. 2, the TV phone is initially in the TV mode, where the user watches the TV program of a selected channel. The MSP 30 monitors the output of the MRFU 16 and determines whether or not an



incoming call message has been received via the MRFU 16 at step 102.

If it is determined at step 102 that a message associated with an incoming call has not been received, the MSP 30 continues to operate in the TV mode.

5

If it is determined at step 102 that the MRFU 32 has received a message associated with an incoming call, the program proceeds to step 104 where the MSP 30 determines the incoming call alarm mode as set in its memory. As noted above, three such incoming call alarm modes can be (1) an audio alert, (2) muting the audio of the TV program and switching an image onto the display and (3) display an incoming call message on a specific region of the display. At step 104, the MSP 30 also informs the user of the incoming call in accordance with the set incoming call alarm mode. While the incoming call alarm mode may be selected from among a bell mode, a vibration mode and a lamp (soundlessness) mode, for example, the audio signal of a TV program or output of the OSD 34 may also be suitably controlled to alert the user. For example, the user may be alerted by muting the output of the TV audio signal processor 38 and/or by controlling the display unit 40 to switch to display a preprogrammed screen, or to display specific characters thereon which visually alerts the user of an incoming call. Such an alerting operation can be implemented by applying a mute signal MUTE to the TV audio signal processor 38. In addition, MSP 30 may send a stored character generating control signal CD to the OSD, which uses the CD signal to generate a call alert video display. The MSP 30 may switch the MUX (via a high SEL-M) to display a corresponding preprogrammed screen

20

25

generated by the OSD 34. Alternatively, using the character  
 superimposing signal generated by character superimposing signal  
 generator 28, the MSP may repeatedly switch the MUX 36 so that a call  
 alert video display in the form of a short character message is displayed  
 5 at a particular region of the display, while displaying the TV program in the  
 remaining region of the display.

Subsequently, the program proceeds to step 106 at which it is  
 determined by the MSP 30 whether or not an automatic response  
 switching mode has been set through detection of a flag of the memory  
 therein. The term "automatic response switching mode" means an  
 operation mode set by the user that automatically connects the incoming  
 call.

If it is determined at step 106 that the automatic response  
 switching mode has been set, the program proceeds to step 110 where  
 the MSP 30 turns off the TV unit 18 and the TV audio signal processor 38  
 15 by deactivating the power control signal PW. This reduces the power  
 consumption of a battery. At subsequent step 112 the MSP 30 switches  
 from the TV mode to the phone mode and supplies the MRFU 16 with a  
 response signal for the incoming call. The MRFU 16 transmits the  
 20 response signal to the base station through the reverse channel in order  
 to establish a telephone conversation channel to speak over. The  
 subsequent establishment of the call can follow the procedures of a  
 conventional portable phone.

If, on the other hand, it is determined at step 106 that the automatic response switching mode is not set, the program proceeds to step 108 where the MSP 30 detects whether or not an input signal has been received from the user indicating the user wants to accept the incoming call. The signal may be generated by a key on keypad 32 designating phone call acceptance. Generally, any key other than a SEND key, an OK key or an END key may be used for the phone call acceptance key. If the user accepts the incoming call by depressing the appropriate key, the program proceeds to steps 110 and 112, as described above.

On the other hand, if it is determined at step 108 that there is no indication that the user accepts the call (for example, the phone call acceptance key has not been depressed) the program proceeds to step 114, where the MSP 30 determines whether or not a key on the keypad that signals rejection of an incoming call (such as the END key) has been selected. At step 114, the key signaling rejection of the call is not selected, the MSP 30 determines that a user does not want to take the incoming call and returns to TV mode. The MSP repeatedly executes the above-mentioned process beginning with step 102. Accordingly, when an incoming call message is received from the base station through the forward channel, the MSP 30 informs the user that an incoming call occurs through a process routine beginning with step 104.

At the step 114, if the user selects a key on the key pad 32 signaling rejection of the incoming call, the program proceeds to step 116

where the MSP 30 rejects the incoming call. Such a rejection of the incoming call is performed by the MSP 30 disabling or discontinuing any call alerts, for example, disabling ring tone data outputted to the speaker SP initiated by ring data included in the data of the forward channel.

- 5 When the output of alerts associated with an incoming call ring are disabled, the phone returns to TV mode, where a TV image and an audible sound of a selected channel are reproduced and outputted continuously through the TFT-LCD 46 of the display unit 40 and the TV audio signal processor 38. The MSP 30 also repeatedly executes the process beginning with step 102.

As apparent from the above description, the TV phone of the present invention provides an advantage in that in a state in which a user watches a TV program in a TV mode, when an incoming of a call occurs, a user is so informed, and the operation mode of the TV phone may be automatically or manually switched from the TV mode to the phone mode. When switched, the TV unit is turned off, thereby preventing excessive discharge of the battery.

While the description in the above embodiment includes the TV unit 18 that outputs R, G, and B video signal, the display unit 40 that converts the analog video signals into digital video signals and displays the converted signal, and the multiplexer 36 that selectively transmits TV video signals and the video signal of the OSD to the display unit, the above structural elements can be replaced with other elements that perform the same functions by a person skilled in the art.

For example, the TV unit may alternatively output analog complex video signals and complex synchronizing signals. The display unit may be constructed with an LCD drive and a TFT-LCD that displays images using the complex video signals and complex synchronizing signal from the TV unit. The image of the OSD can similarly be displayed using a video memory such as a video memory or video ROM and a video memory controller (including a timing generator) that generates a complex video signal. As a result, the switching operation in the multiplexer is not necessary and the time for displaying the image of the OSD can be reduced.

In addition, using a video memory and video memory controller as described immediately above, the image of the OSD can be displayed at desired position on the display unit without the character superimposing signal generator 28 shown in Fig. 1. Where the display of the OSD is controlled as described immediately above, a character message alerting the user to an incoming call of the OSD can be displayed without activation of the image-superimposing signal.

In addition, in the TV phone of the present invention, the operation mode of the TV phone is relatively easily switched from the TV mode to the phone mode while interrupting power supplied to a TV module related circuit when an incoming call occurs during the viewing of any TV program in a TV mode, thereby reducing battery power consumption.

While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiment, but, on the contrary, it is intended to cover various  
5 modifications within the spirit and scope of the appended claims.

**WHAT IS CLAIMED IS:**

1. A method of controlling switching of an operation mode of a TV phone, where the TV phone includes a TV unit that reproduces and outputs a video signal and an audio signal from a selected channel, a display unit that interfaces with the TV unit and receives and displays the video signals from the TV unit while in a TV mode, a TV audio signal processor that receives the audio signal from the TV unit and outputs audible sound, a mobile radio frequency processor (MRFU) that receives data of a forward channel transmitted from a base station, and a mobile signal processor (MSP) that provides a channel selecting signal to the TV unit in the TV mode, and transmits and receives an audio signal input from the MRFU in a phone mode, the method comprising the steps of:

    alerting the user of an incoming call in response to an incoming call signal transmitted from the base station when the TV phone is in a TV mode; and

    switching from the TV mode to the phone mode.

2. The method of Claim 1, wherein the step of switching from the TV mode to the phone mode is in response to input by the user of a command that permits the call to proceed.

3. The method of Claim 1, wherein the step of switching from the TV mode to the phone mode is prevented in response to input by the user of a command rejecting the incoming call.



4. The method of Claim 3, wherein the input by the user of a command rejecting the incoming call terminates the step of alerting the user of an incoming call.

5 5. The method of Claim 1, wherein the switching from the TV mode to the phone mode includes transmitting an incoming call response message to the calling party through a reverse channel.

6. The method of Claim 1, wherein the step of alerting the user of an incoming call includes displaying a character message on the display unit.

7. The method of Claim 1, wherein the step of alerting the user of an incoming call includes interrupting of an audio output from a speaker of the TV phone.

8. The method of Claim 1, wherein the step of alerting the user of an incoming call includes generating an audio output from a speaker of the TV phone.

20 9. The method in accordance with Claim 1, wherein the switching step includes disabling the operation of the TV unit.

25 10. The method in accordance with Claim 9, wherein the disabling of the operation of the TV unit is by interrupting power supply voltage supplied to the TV module.

11. The method of Claim 1, wherein the step of switching from the TV mode to the phone mode, is performed automatically upon receipt of an incoming call signal.

5 12. The method of Claim 11, including the additional step of setting the TV phone to an automatic mode prior to reception of the incoming call signal, the step of switching from the TV mode to the phone mode being enabled by the setting of the automatic mode and occurring automatically.

10 13. The method of Claim 11, wherein the switching step further comprises the step of transmitting a response message for the incoming call to the calling party through a reverse channel.

15 14. A method of controlling switching of an operation mode of a TV phone, the method comprising the steps of:

alerting the user of an incoming call in response to an incoming call signal transmitted from the base station when the TV phone is in a TV mode; and

20 switching from the TV mode to the phone mode.

15 15. The method in accordance with Claim 14, wherein the switching step includes disabling the operation of the TV unit.

**ABSTRACT OF THE DISCLOSURE**

A method of controlling switching of an operation mode of a TV phone. The TV phone includes a TV unit that reproduces and outputs a video signal and an audio signal from a selected channel. A display unit interfaces with the TV unit and receives and displays the video signals from the TV unit while in a TV mode. A TV audio signal processor receives the audio signal from the TV unit and outputs audible sound. An MRFU receives data of a forward channel transmitted from a base station. An MSP provides a channel selecting signal to the TV unit in the TV mode and transmits and receives an audio signal input from the MRFU in a phone mode. The method comprises the steps of alerting the user of an incoming call in response to an incoming call signal transmitted from the base station when the TV phone is in a TV mode and switching from the TV mode to the phone mode, the switching preferably including disabling the operation of the TV unit.

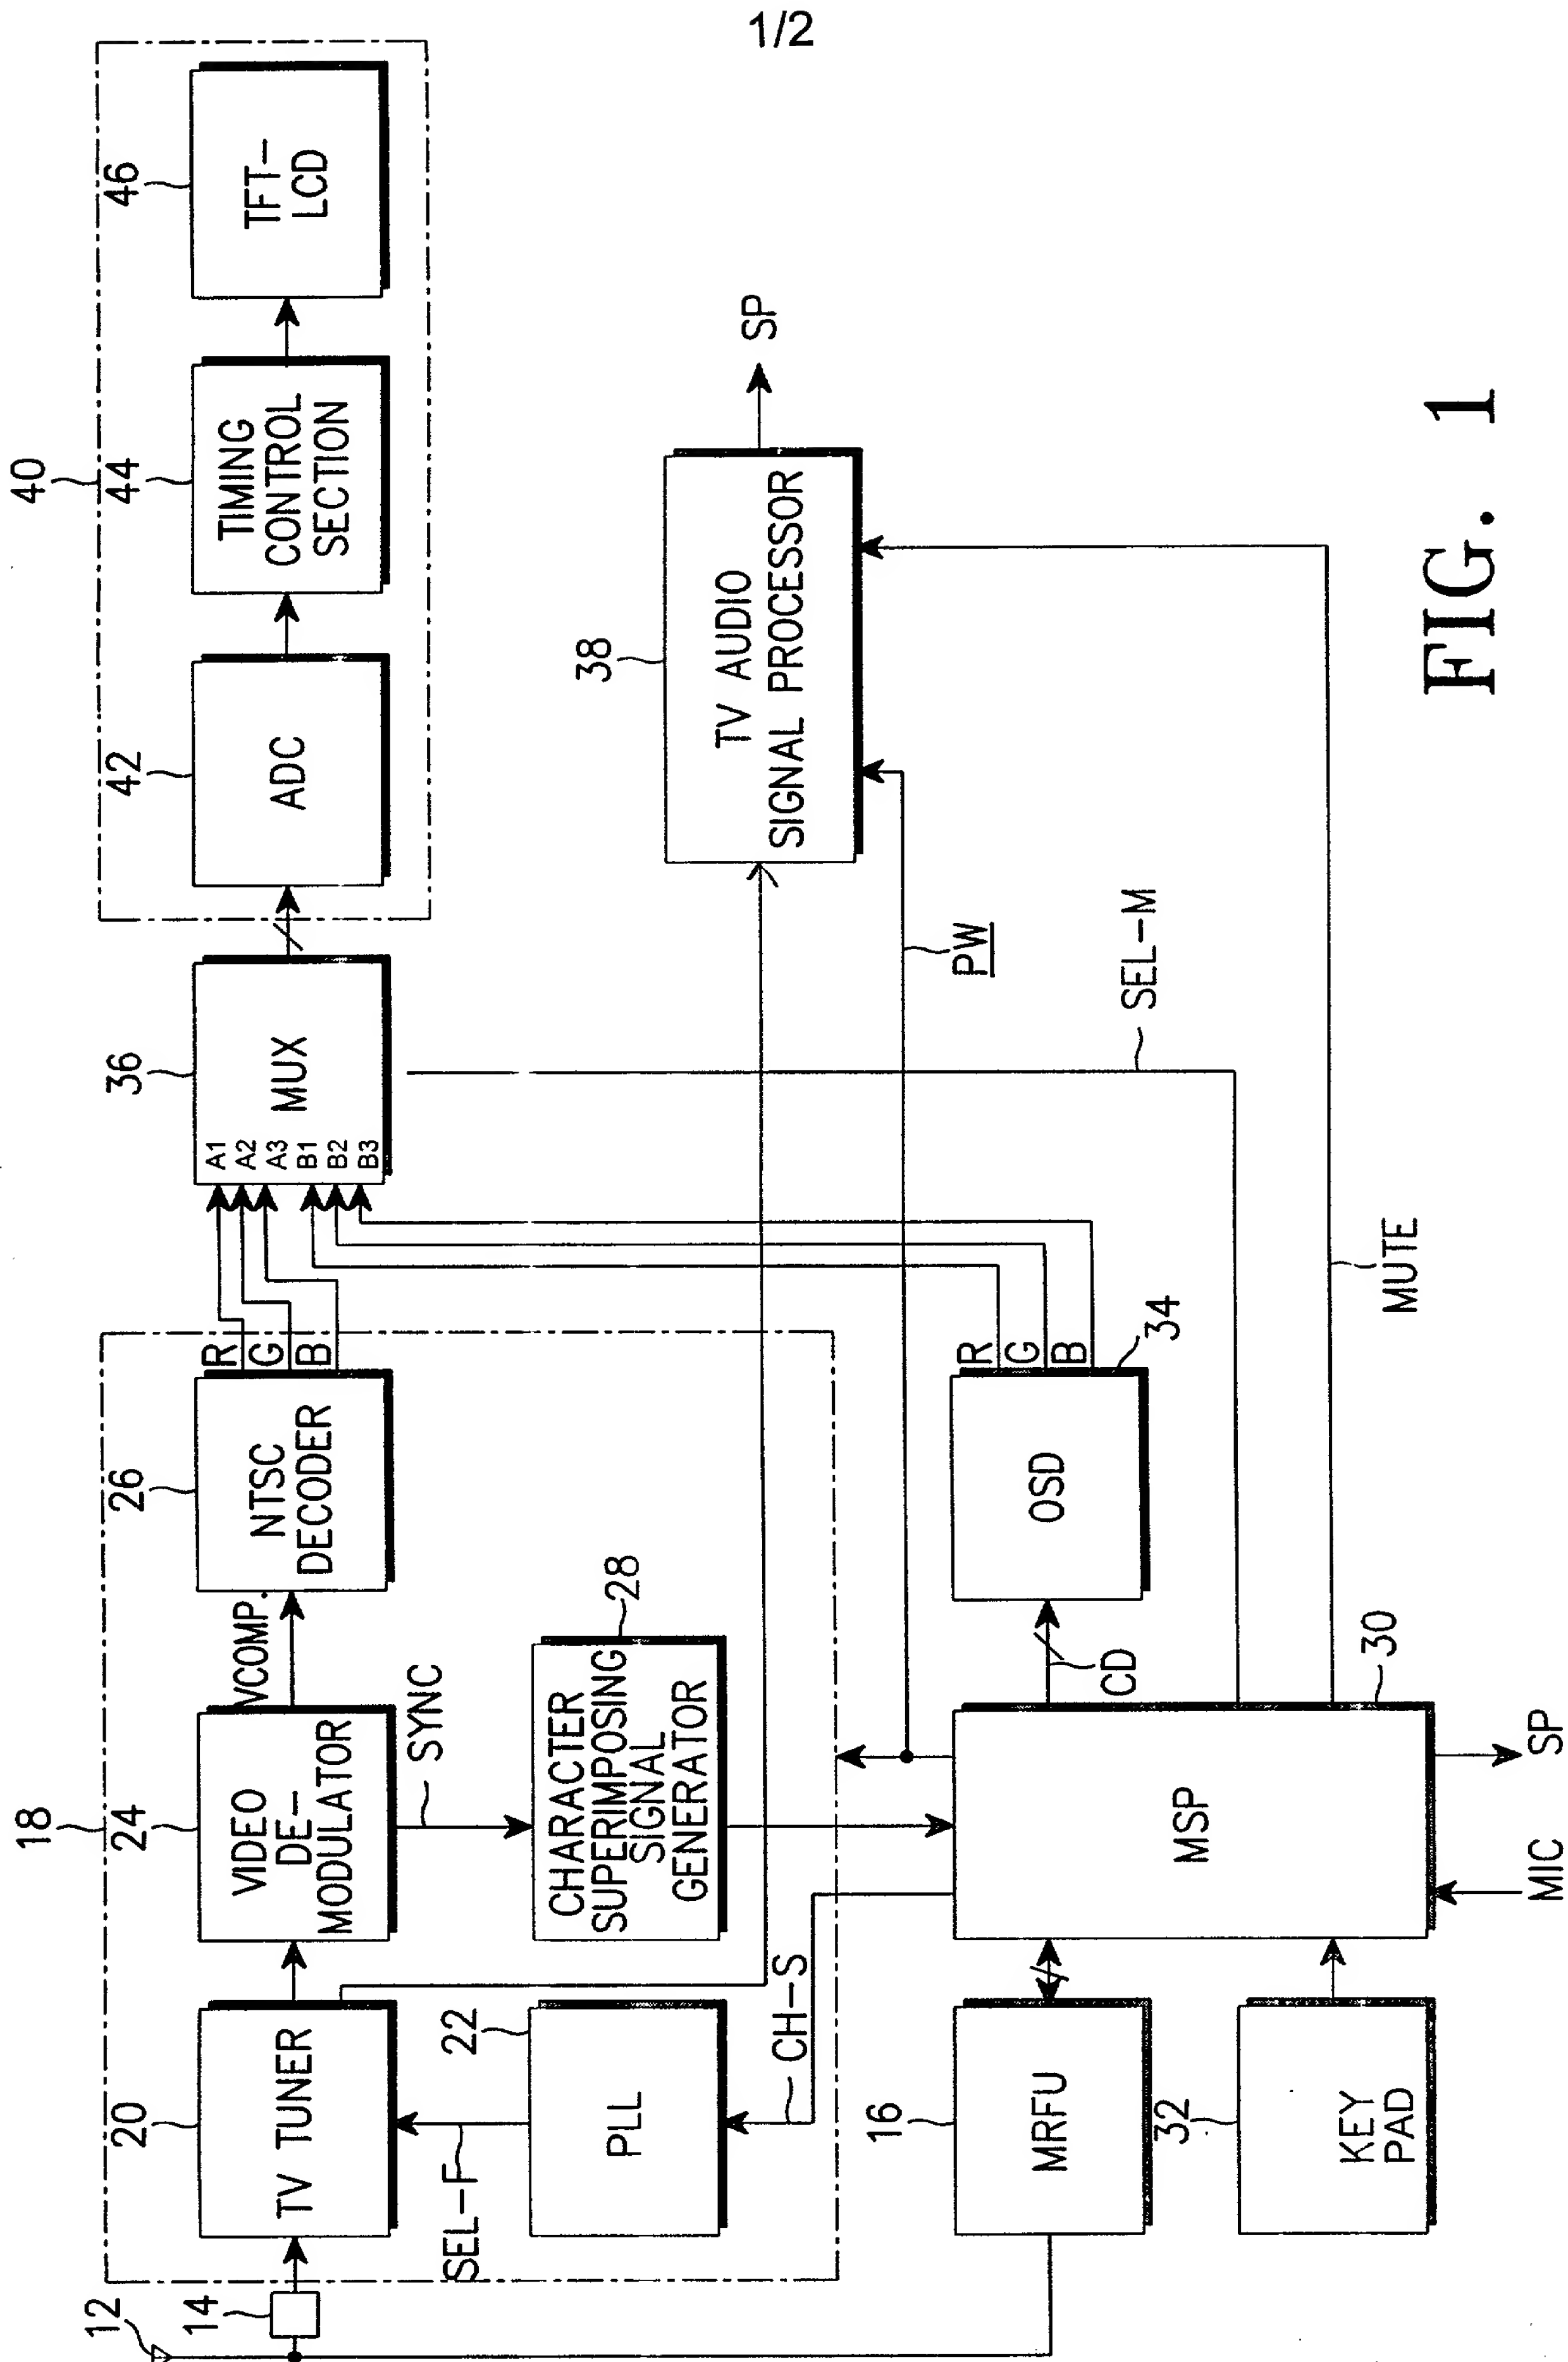


FIG. 1

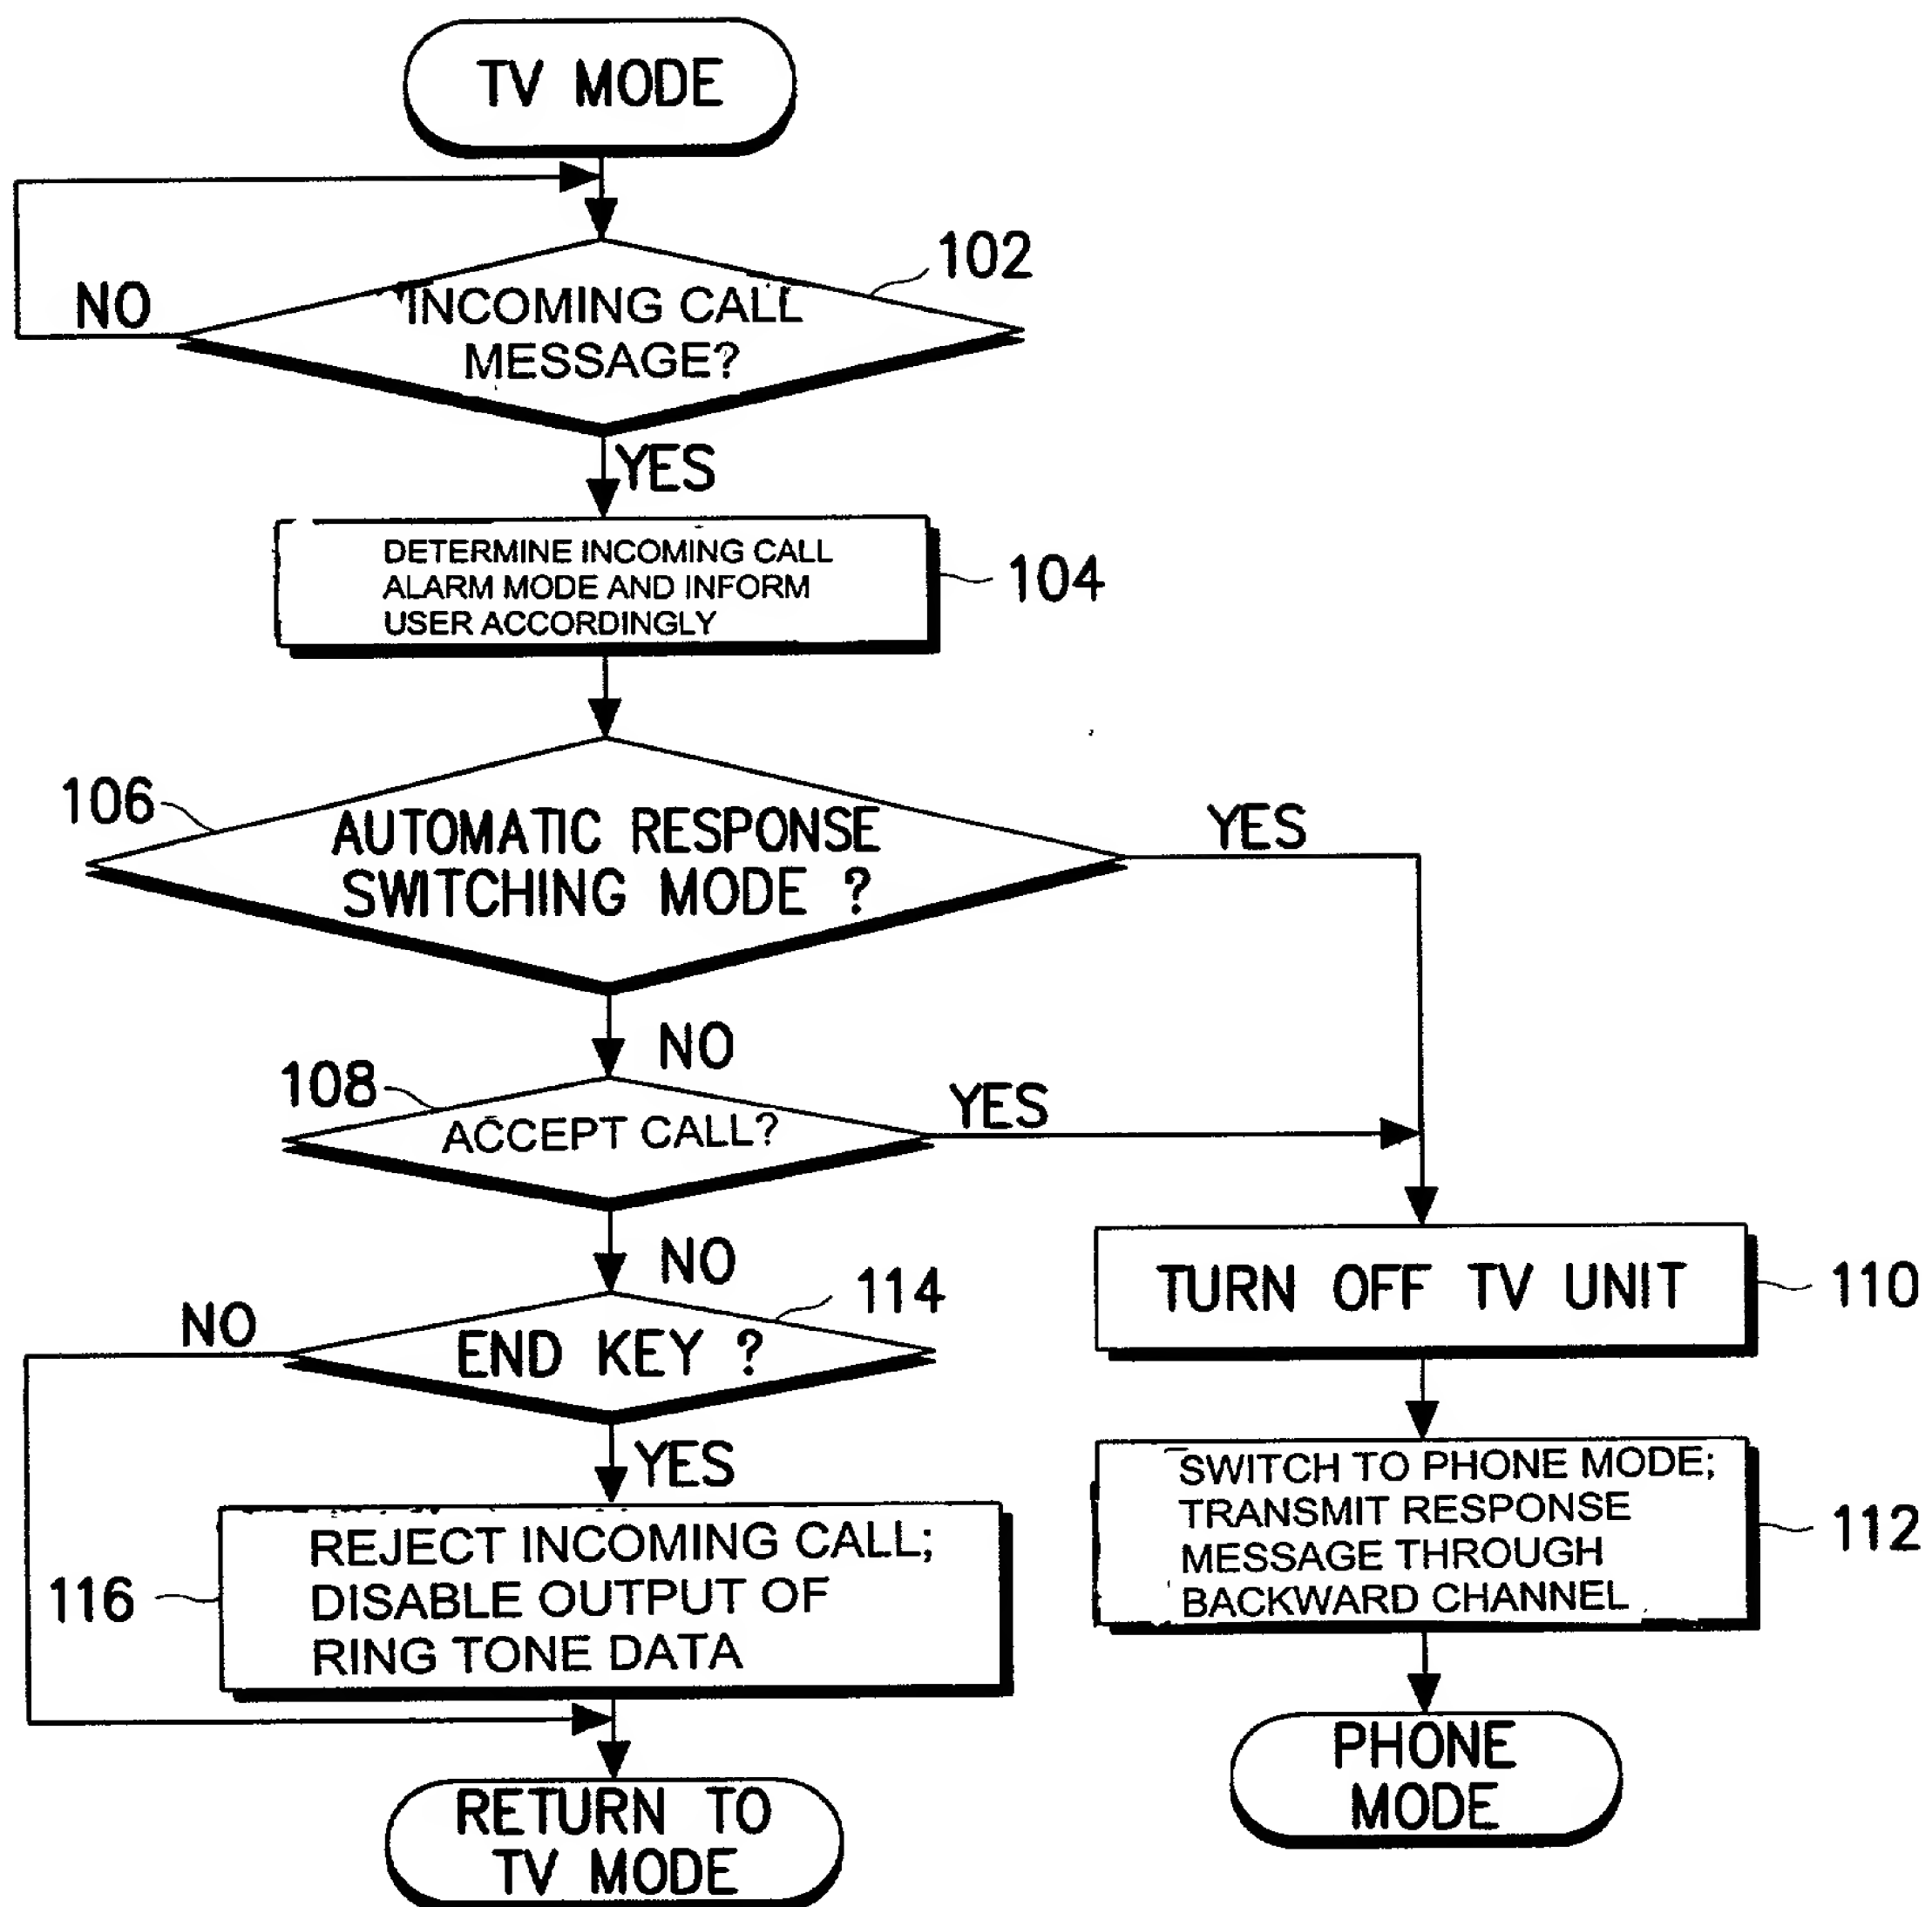


FIG.2

PTO/SB/01 (6/95)

**DECLARATION**Docket No. 678-413 (P8984)

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (*if only one name is listed below*), or an original, first and joint inventor (*if plural names are listed below*), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TITLE:** METHOD AND SYSTEM FOR CONTROLLING OPERATION MODE SWITCHING OF PORTABLE TELEPHONE (TV) PHONE  
the specification of which either is attached hereto or indicates an attorney docket no. 678-413 (P8984), or:

[ ] was filed in the U.S. Patent & Trademark Office on \_\_\_\_\_ and assigned Serial No. \_\_\_\_\_,

[ ] and (*if applicable*) was amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, or §119(e) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>1998-59063</u>	<u>Korea</u>	<u>26/12/1998</u>	<b>Priority Claimed:</b>
(Application Number)	(Country)	(Day/Month/Year filed)	Yes [X] No [ ]
_____	_____	_____	Yes [ ] No [ ]
(Application Number)	(Country)	(Day/Month/Year filed)	

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

<u>_____</u>	<u>_____</u>	<u>_____</u>
(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)
_____	_____	_____
(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)

I hereby appoint the following attorneys: PETER G. DILWORTH, Reg. No. 26,450; ROCCO S. BARRESE, Reg. No. 25,253; DAVID M. CARTER, Reg. No. 30,949; PAUL J. FARRELL, Reg. No. 33,494; PETER DELUCA, Reg. No. 32,978; JEFFREY S. STEEN, Reg. No. 32,003; ADRIAN T. CALDERONE, Reg. No. 31,748; GEORGE M. KAPLAN, Reg. No. 28,375; JOSEPH W. SCHMIDT, Reg. No. 36,920; RAYMOND E. FARRELL, Reg. No. 34,816; RUSSELL R. KASSNER, Reg. No. 35,183; CHRISTOPHER G. TRAINOR, Reg. No. 39,517; GEORGE LIKOUREZOS, Reg. No. 40,067; JAMES M. LOEFFLER, Reg. No. 37,873; EDWARD C. MFAGHER, Reg. No. 41,189; SUSAN L. HESS, Reg. No. 37,350; MICHAEL P. DILWORTH, Reg. No. 37,311; PETER B. SORELL, Reg. No. 44,349; and GLENN D. SMITH, Reg. No. 42,156, each of them of DILWORTH & BARRESE, 333 Earle Ovington Boulevard, Uniondale, New York 11553 to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Page 1 of 2

Paul J. Farrell, Esq.  
DILWORTH & BARRESE  
333 Earle Ovington Boulevard  
Uniondale, New York 11553  
Tel. No.: (516) 228-8484

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Jae-Duk YANG Citizenship Korea  
Inventor's signature: Jae Duk Yang Date: December 24, 1999  
Residence & Post Office Address: 240-2, Taemyong 2-dong, Nam-gu, Taegu-kwangyokshi, Korea

FULL NAME OF SECOND JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF THIRD JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF FOURTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF FIFTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF SIXTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_

Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
Residence & Post Office Address: \_\_\_\_\_